

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	16-5-15

Technical Data



Material: Pin(outer sleeve):Brass, machined CuZn38Pb2
 Plating(outer sleeve):
 Tin Plated:2μm/80μm"Ni, 5μm/200μ"Sn
 Gold Plated:2μm"/80μm"Ni, 0.8μ" gold
 Insulator:PPS UL94V-0

Electrical:

Current rating:3Amps/contact max.
 Contact resistance: ≤4mΩ/contact
 Insulation resistance: ≥1000MΩ at V=100V
 Operating voltage:60VAC/DC

Mechanical:

Operating temperature:-40 ° C to+105 ° C
 Soldering temperature:+255 ° C

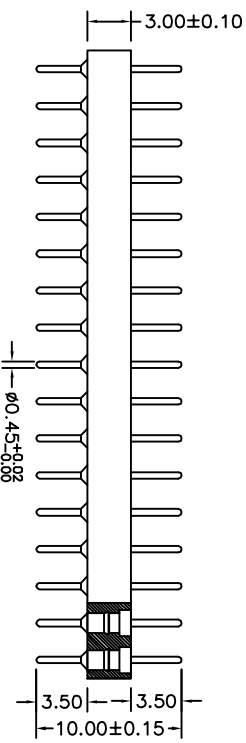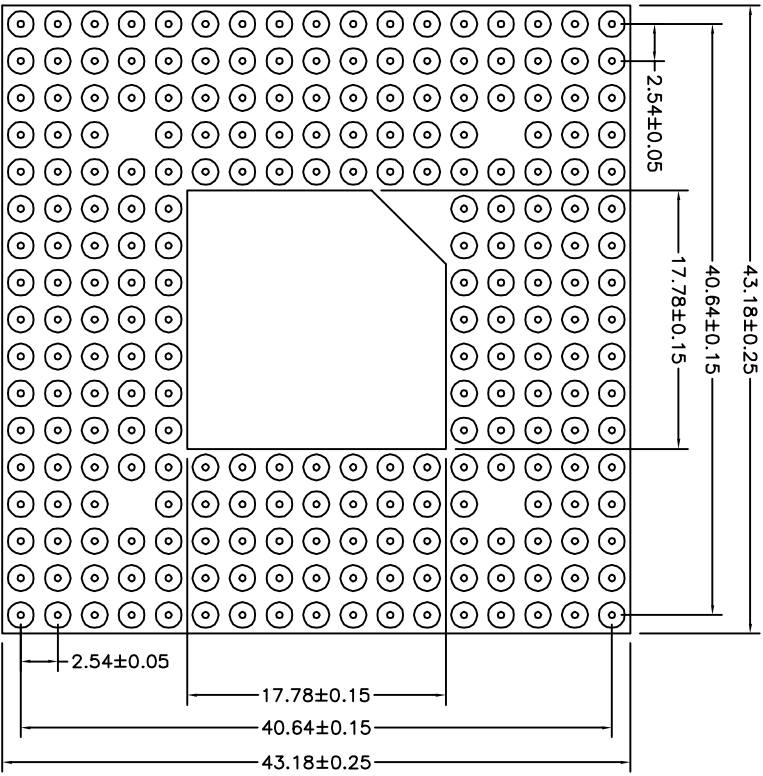

QZT	X	X	XXX	XX	XXX	X
Pitch(mm) A=2.54X2.54 B=2.54X1.27 C=1.27X1.27	Angel Options P=PGA C1=PLCC-SMT C2=PLCC-DIP	No. of Positions XXX positions 236=236PIN	Pin plated T1=Tin 150u" T2=Tin 200u" G1=G/F G2=Gold 3u" G3=Gold 10u" G4=Gold 15u" G5=Gold 30u"	Pin Length Options 1000=10.00mm	Specifications A=Public seat B=Female seat	

QZTconn 东莞市启之泰电子科技有限公司

TOLERANCE	PROJECTION	TITLE:
X,XXX ±0.05 X,XX ±0.15 X,X ±0.20 X, ±0.30 ANGLE ±5.0°	DATE: 2016-5-15 DRAWN: TANG-S-G CHECKED: APPROVED:	Pin grid array sockets 2.54x2.54mm 236PIN PART NO:QZTA-P236XX1000A DRAWING NO:2016051526
REV: A0	UNIT: mm	SCALE: 1:1
	SIZE: A4	PAGE: 1/2