






REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	16-4-12

Technical Data
 Material:
 CONTACT::phocphor brone
 Plating (outer sleeve):
 Tin Plated:2 μ m/80 μ m"Ni, 5 μ m/200 μ "Sn
 Gold Plated:2 μ m"/80 μ m"Ni, 0.8 μ " gold
 Insulator:PPS UL94V-0

Electrical:
 Current rating:2amps/contact max.
 Contact resistance:max 20m Ω
 Insulation resistance:min 5000M Ω
 Dielectric strength:min 600V RMS

Mechanical:
 Contact pressure:min 1.5N per contact
 Mechanical life:min 50 cycles
 Operating temperature:-40 $^{\circ}$ C to+105 $^{\circ}$ C
 Soldering temperature:+255 $^{\circ}$ C

NO.OF CONTACTS	A	B	C	D	E
28P	18.18	18.18	7.62	7.62	20.40

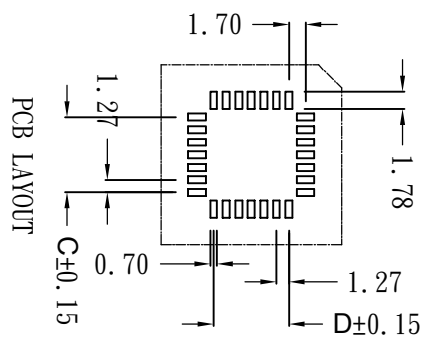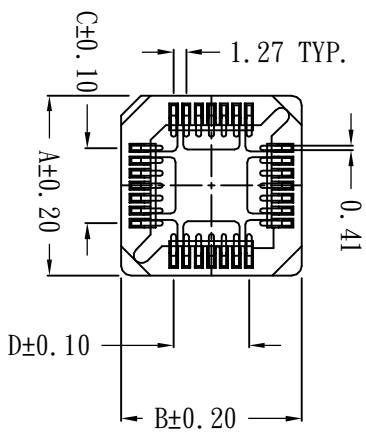

PCB LAYOUT

QZT	X	X	XX	XX	X	XXX
Pitch (mm) A=1.27 B=1.778 C=2.00 D=2.54	Angel Options P=PGA C1=PLCC-SMT C2=PLCC-DIP	No. of Positions XX positions	Pin plated T1=Tin 150u" T2=Tin 200u" G1=G/F G2=Gold 3u" G3=Gold 10u" G4=Gold 15u" G5=Gold 30u"	Insulator color 1=Black 2=Brown	Serial number 001-999	

dzlconn 启之泰 东莞市启之泰电子科技有限公司

TOLERANCE	PROJECTION	TITLE:
X,XXX ±0.05		PLCC Connectors 1.27mm
X,XX ±0.15		DATE: 2016-4-12
X,X ±0.20		DRAWN: TANG-S-G
X, ±0.30		CHECKED:
ANGLE ±5.0 $^{\circ}$		APPROVED:
		PART NO:QZTA-C128XXX002
		DRAWING NO:2016041202
		REV: A0 UNIT: mm SCALE: 1:1 SIZE: A4 PAGE: 1/2